VT-BLS501-AC

Explosion Proof and Anti-corrosion Bullet Camera Housing with IR and sunshade

IP68

- Usual: AC220V/DC12V
- ATEX Zone 1&2 / 21&22
- High quality IR lamp, long service life, irradiation distance up to100 meters
- Made of 304 stainless steel material (316,316L for optional)

EX Marking

EXD EXTB T6

Certification

Markets

Specification

VT-BLS501-AC

	Ex-Level	ATEX II 2G Ex d IIC T6 Gb II 2D Ex tb IIIC IP68 T80°C Db
	Ingress Protection level	IP68
specifications	Temperature range	-40°C～60°C
	Relative humidity	≤ 95%（+25°C)
	Atmospheric pressure	80kpa～106 kpa
	Thermostat System	optional
	Supply voltage	DC12V /AC220V（optional）/POE (Optional)
	Suitable Environment	Apply to explosive gas and combustible dust environment
	Material	304 stainless steel (316L for optional)
	Inlet interface specifications	2pcs M25*1.5 output (original G3/4)
	Installation method	PTZ, Wall Hanging dyadic, fixed bracket, Pillar base
	Inside dimension	Φ100mm*300mm（length）
	Windows area	Φ65
	Wave length	808nm
	Infrared distance	50MM 100M optional
	Infrared switch	When <0Lux, auto open

WV-U1132A
WV-U1142A

WV-U1132A Product Data Sheet
WV-U1142A Product Data Sheet

WV-S1132
WV-S1136A

WV-S1132 Product Data Sheet
WV-S1136A Product Data Sheet

NBN-73023-BA

NBN-73023-BA Product Data Sheet

Technical Drawing

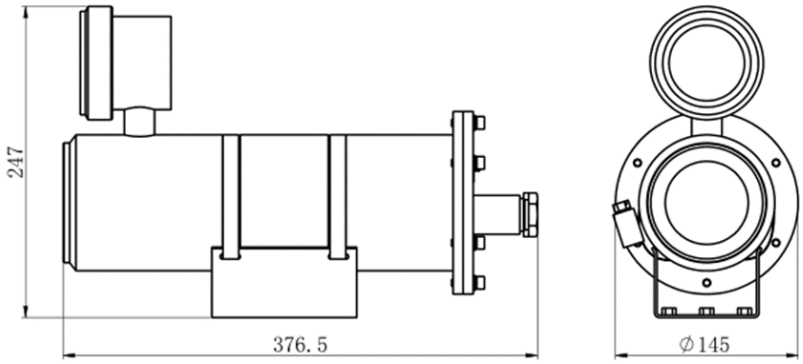

安装尺寸：



VT-B02
Bracket for B series

VT-B04
Bracket for B series

VT-B03
Bracket for B series