

VT-BLS501

Explosion Proof Bullet Camera Housing with IR and sunshade

IP68



- Usual: AC220V/DC12V
- ATEX Zone 1&2 / 21&22
- High quality IR lamp, long service life, irradiation distance up to 100 meters
- Made of 304 stainless steel material (316,316L for optional)
- resolution up to 1920 x 1080 pixel, 18X Zoom

EX Marking



Certification



Markets



	Ex-Level	ATEX II 2G Ex d IIC T6 Gb II 2D Ex tb IIIC IP68 T80°C Db
	Ingress Protection level	IP68
specifications	Temperature range	-40°C~60°C
	Relative humidity	≤ 95% (+25°C)
	Atmospheric pressure	80kpa~106 kpa
	Thermostat System	optional
	Supply voltage	DC12V /AC220V (optional) /POE (Optional)
	Suitable Environment	Apply to explosive gas and combustible dust environment
	Material	304 stainless steel (316L for optional)
	Inlet interface specifications	2pcs M25*1.5 output (original G3/4)
	Installation method	PTZ, Wall Hanging dyadic, fixed bracket, Pillar base
	Inside dimension	Φ100mm*300mm (length)
	Windows area	Φ65
	Wave length	808nm
	Infrared distance	50MM 100M optional
	Infrared switch	When <0Lux, auto open



WV-U1132A
WV-U1142A



[WV-U1132A Product Data Sheet](#)
[WV-U1142A Product Data Sheet](#)



WV-S1132
WV-S1136A



[WV-S1132 Product Data Sheet](#)
[WV-S1136A Product Data Sheet](#)




NBN-73023-BA




[NBN-73023-BA Product Data Sheet](#)

Technical Drawing

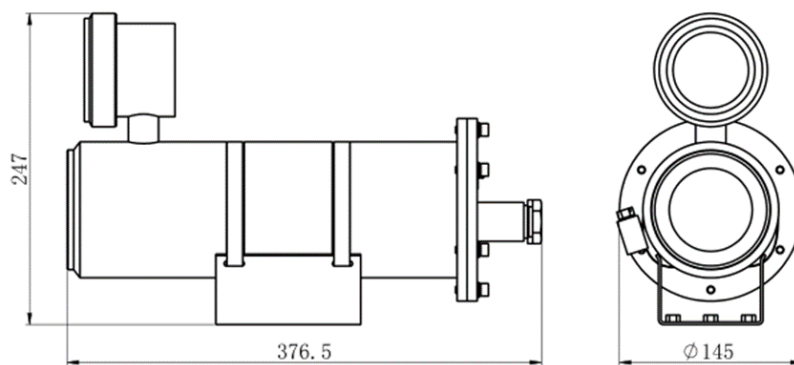

安装尺寸:



VT-B02 Bracket for B series



VT-B04 Bracket for B series



VT-B03 Bracket for B series

